

A photograph of a blue electric car (EV) parked at a charging station. The car is plugged into a black charging station with an orange cable. The station has a digital display and the word 'RESERVED' written vertically on it. The background shows a parking lot with other cars.

Energy Meter DC IMD, Hall Sensor Module Selection for EV Charger

1-phase&3-phase&DC Energy Meter, IMD, Hall Sensor Module Selection Plan
for all types of EV Charger.

Ver. Date: March,21st 2024

Acrel Co., Ltd.

No.253 Yulv Road, Jiading
District, Shanghai, China



0. Major Types of EV Charging Charger and their requests for Energy Meter and DC IMD

Type 1: Small 1-phase AC EV Charger

- Noted: Request below are request of EV charging station to the energy meter used by it.
- Rated Voltage: Request rated voltage in the range of 220~264Vac L-N (1-phase)
- Rated Current: Request Max current at least 60A AC
- Communication: Request RS485 communication for control function
- Metering: Request Multi-rate/tariff metering as a optional function



Type 2: Small 3-phase AC EV Charger

- Noted: Request below are request of EV charging station to the energy meter used by it.
- Rated Voltage: Request rated voltage in the range of 380~456Vac L-L & 220~264Vac L-N (3-phase)
- Rated Current: Request Max current input at least 80A AC (direct connect type) or Max 5A AC current input (via CTs)
- Communication: Request RS485 communication for control function
- Metering: Request Multi-rate/tariff metering as a optional function



Type 3: Medium&Large DC EV Charger

- Rated Voltage: Request rated voltage in the range of 200~1000Vdc
- Rated Current: Request Max current input normally not more that 500A DC
- Communication: Request RS485 communication for control function
- Metering: Request Multi-rate/tariff metering as a optional function
- Insulation: Request insulation monitoring for EV Charger between the DC+ and ground or DC- pole and ground.



1. Energy Meter Model Selection (For Small 1-phase AC EV Charger Energy Monitoring)

Model 1: ADL200 1-phase DIN-rail Energy Meter

- Rated Voltage: 220~264Vac L-N (45~65Hz)
- Rated Current: **10(80)A AC**
- Accuracy: Class 1.0 for active energy monitoring
- Communicaiton: **RS485 Interface**, MODBUS-RTU Protocol
- Extra Function: **Multi-rate/tariff** metering & **Pulse** Output
- Certificate&Standard: IEC; CE; **CE-MID**;EAC
- More Introduction: https://www.acrel-electric.fr/product/adl200_single_phase_din_rail_energy_meter



Model 2: ADL100-ET 1-phase DIN-rail Energy Meter

- Rated Voltage: 220~264Vac L-N (45~65Hz)
- Rated Current: 10(60)A AC
- Accuracy: Class 1.0 for active energy monitoring
- Communicaiton: **RS485 Interface**, MODBUS-RTU Protocol
- Extra Function: **Multi-rate/tariff** metering&**Pulse** Output
- Certificate&Standard: CE; EAC
- More Introduction: https://www.acrel-electric.fr/product/adl100_et_single_phase_din_rail_energy_meter



Model 3: ADL10-E 1-phase DIN-rail Energy Meter

- Rated Voltage: 220~264Vac L-N (45~65Hz)
- Rated Current: 10(60)A AC
- Accuracy: Class 1.0 for active energy monitoring
- Communicaiton: **RS485 Interface**, MODBUS-RTU Protocol
- Certificate&Standard: CE; EAC
- More Introduction: https://www.acrel-electric.fr/product/adl10_e_single_phase_energy_meter



2. Energy Meter Model Selection (For Small 3-phase AC EV Charger Energy Monitoring)


Model 1: ADL400 3-phase DIN-rail Energy Meter

- Rated Voltage: 3x380~456Vac L-L & 220~264Vac L-N (45~65Hz)
- Rated Current: 3x10(80)A AC (direct connect) or 3x1(6)A AC (via CTs)
- Accuracy: Class 0.5S for active energy monitoring
- Harmonic: Total and 2~31st harmonic monitoring
- Communication: **RS485 Interface**, MODBUS-RTU Protocol
- Extra Function: **Multi-rate/tariff** metering & **Pulse** Output
- Certificate&Standard: IEC; CE; **CE-MID**;EAC
- More Introduction: https://www.acrel-electric.fr/product/adl400_three_phase_din_rail_energy_meter



Model 2: ADL3000-E 3-phase DIN-rail Energy Meter

- Rated Voltage: 3x380~456Vac L-L & 220~264Vac L-N (45~65Hz)
- Rated Current: 3x10(80)A AC (direct connect) or 3x1(6)A AC (via CTs)
- Accuracy: Class 0.5S for active energy monitoring
- Communication: **RS485 Interface**, MODBUS-RTU Protocol
- Certificate&Standard: **UL**; CE; IEC; EAC
- More Introduction: https://www.acrel-electric.fr/product/adl3000_e_three_phase_multi_function_din_rail_energy_meter

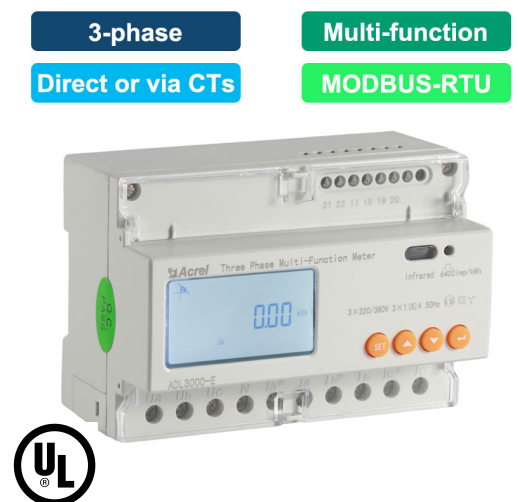

3. DC IMD Model Selection (For Medium&Large DC EV Charger Insulation Monitoring)

Model 1: AIM-D100-CA DC Insulation Monitoring Device

- Application: for DC EV charger Insulation Monitoring
- Insulation Resistance Monitoring Range: 1k ~10M
- Insulation Alarming Range: 10k ~10M
- Insulation Monitoring Mode: Triggered by RS485 Comms.
- Voltage Monitoring: 0~1000Vdc [0.5 Accuracy]
- Communicaiton: **RS485 Interface**, MODBUS-RTU Protocol
- Extra Current Monitoring: 1-channel DC current metering via shunt; 5% accuracy [module name AIM-D100-CAI]
- Auxiliary Power Supply: 9~36Vdc
- Certificate&Standard: CE

DC Insulation
0~1000Vdc
For EV Charger
RS485 MODBUS



Model 1: AIM-D100-T(H/L) DC Insulation Monitoring Device

- Application: for general DC system insulation monitoring.
- Insulation Resistance Monitoring Range: 1k ~10M
- Insulation Alarming Range: 10k ~10M
- Insulation Monitoring Mode: Real-time monitoring
- Voltage Monitoring: 10~100Vdc [Module: AIM-D100-TL]; or 100~1000Vdc [Module: AIM-D100-TH]; accuracy 0.5
- Communicaiton: **RS485 Interface**, MODBUS-RTU Protocol
- Auxiliary Power Supply: 9~36Vdc
- Certificate&Standard: CE

DC Insulation
10~100~1000Vdc
General Usage
RS485 MODBUS



3. Energy Meter Model Selection (For Medium-Large DC EV Charger Energy Monitoring)

Model 1: DJSF1352-RN DC Din-rail Energy Meter

- Voltage Input Range: 0~1000Vdc
- Current Input Range: 0~5Vdc, 4~20mA DC (via Hall Sensor) 0~75mV (via Shunt) and etc.
- Accuracy: Class 1.0 for active energy monitoring
- Communication: **RS485 Interface**, MODBUS-RTU Protocol
- Extra Function: **Multi-rate/tariff** metering & Optional **Dual Circuits Monitoring**
- Certificate&Standard: CE, **UL**
- More Introduction: https://www.acrel-electric.fr/product/djsf1352_rn_dc_dual_circuits_monitoring_din_rail_energy_meter



Model 2: PZ72L-DE DC Panel mounted Energy Meter

- Voltage Input Range: 0~1000Vdc
- Current Input Range: 0~5Vdc, 4~20mA DC (via Hall Sensor) 0~75mV (via Shunt) and etc.
- Accuracy: Class 1.0 for active energy monitoring
- Communication: **RS485 Interface**, MODBUS-RTU Protocol
- Extra Function: **Multi-rate/tariff** metering
- Certificate&Standard: CE
- More Introduction: https://www.acrel-electric.fr/product/dc_multi_function_energy_meter_pz72l_de



3. Shunt&Hall Sensor Model Selection (For Medium-Large DC EV Charging Station)

Model 1: AFL-T Series Shunt

- Current Input Range: 0~(50~500)A DC
- Current Output Range: 0~75mV
- Advantage: High accuracy, strong anti-interference
- Application: Paired with Acrel DC energy meter for current input

DC Current In. DC Current Out.
Max 0~500A DC 0~75mV DC



Model 2: AHKC-EKA Split-core Hall Sensor

- Current Input Range: 0~(50~500)A DC
- Current Output Range: 0~±5Vdc
- Aperture: 20mm
- Auxiliary Power Supply: ±12~±15Vdc
- Advantage: Safety with electricity isolation
- Application: Paired with Acrel DC energy meter for current input

Hall Effect AC&DC Transducer
0~500A AC/DC In. 0~±5/±4Vdc Out.



Model 2: AHKC-EKB Split-core Hall Sensor

- Current Input Range: 0~(200~1000)A DC
- Current Output Range: 0~±5Vdc
- Aperture: 40mm
- Auxiliary Power Supply: ±12~±15Vdc
- Advantage: Safety with electricity isolation
- Application: Paired with Acrel DC energy meter for current input

Hall Effect AC&DC Transducer
0~1000A AC/DC In. 0~±5/±4Vdc Out.

